


Section 7 - Half ridge/Wallplate

Variable angle 5-45° wall plate assembly

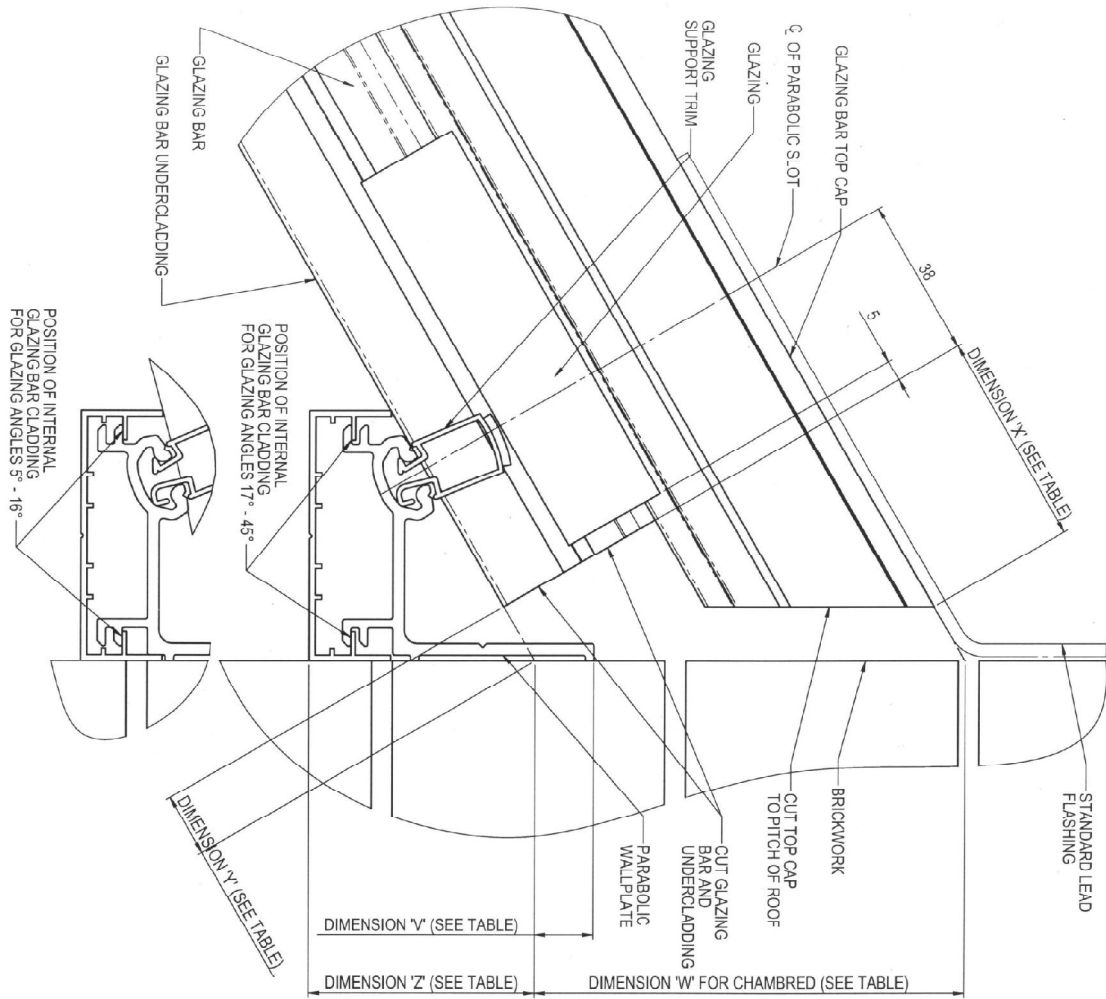

GLAZING ANGLE	DIMENSION V*	DIMENSION W*	DIMENSION X*	DIMENSION Y*	DIMENSION Z*
5°	36.21	89.2	7.78	7.39	28.80
6°	34.56	86.4	9.35	7.51	29.44
7°	33.90	89.5	10.92	7.64	30.10
8°	33.23	88.8	12.59	7.77	30.77
9°	32.54	90.00	14.09	7.92	31.46
10°	31.85	90.30	15.68	8.08	32.16
11°	31.13	90.50	17.28	8.26	32.87
12°	30.41	90.90	18.99	8.44	33.59
13°	29.67	90.12	20.55	8.64	34.39
14°	28.91	91.80	22.17	8.86	35.09
15°	28.14	92.0	23.83	9.09	35.87
16°	27.34	92.5	25.59	9.33	36.66
17°	26.54	92.90	27.19	9.60	41.46
18°	25.71	93.50	28.90	9.88	42.29
19°	24.86	94.00	30.64	10.18	43.14
20°	24.00	94.60	32.31	10.51	44.00
21°	23.11	95.20	34.14	10.85	44.89
22°	22.20	95.80	35.93	11.22	45.80
23°	21.26	96.60	37.75	11.60	46.74
24°	20.31	97.30	39.59	12.02	47.69
25°	19.32	98.10	41.47	12.46	48.68
26°	18.31	98.90	43.37	12.93	49.69
27°	17.28	99.80	45.31	13.42	50.72
28°	16.21	100.70	47.28	13.95	51.79
29°	15.11	101.6	49.28	14.51	52.89
30°	13.98	102.50	51.34	15.10	54.02
31°	12.82	103.70	53.43	15.70	55.18
32°	11.62	104.80	55.57	16.39	56.38
33°	10.38	106.00	57.78	17.10	57.62
34°	9.10	107.20	59.98	17.84	58.90
35°	7.78	108.50	62.27	18.63	60.22
36°	6.42	109.90	64.61	19.47	61.58
37°	5.01	111.30	67.01	20.36	62.99
38°	3.55	112.80	69.48	21.30	64.45
39°	2.04	114.60	72.01	22.29	65.96
40°	0.47	116.50	74.63	23.34	67.53
41°	-1.16	117.80	77.31	24.46	69.16
42°	-2.85	119.50	80.07	25.64	70.85
43°	-4.61	121.50	82.93	26.89	72.61
44°	-6.44	123.50	86.88	28.21	74.43
45°	-8.34	125.70	88.93	29.61	76.34